

## EH5500 Series (6KVA-10KVA)


The EH5500 series is a new type high-frequency online UPS. Adopts advanced DSP digital control technology to effectively improve product performance and system reliability, and higher power density small size, light weight and high work efficiency. Effectively solve power problems such as power cut-off, Grid over voltage / low voltage, voltage instantaneous drop, amplitude reduction, high voltage pulse, surge voltage, harmonic distortion, clutter interference, frequency fluctuation and provide best power for load.



### Product performance

- With double conversion online design, zero output transfer time.
- Adopt DSP digital control, excellent performance indicators, more steady and reliable.
- Adopt active power factor correction technology (PFC), the input power factor is 1, can reduced the pollution to the grid, to energy saving and reducing system investment cost.
- Ultra-wide input voltage range , input voltages available 110V instead of turn to battery power.
- With LCD+LED real-time display, UPS operating available for Detection
- With self- detection function, can detect hidden faults of UPS
- Cold start by battery without grid Input.
- Input frequency range 40~70Hz, support various fuel generators
- With AC input over voltage, low voltage protection, output overload protection, short circuit protection, temperature protection, battery low voltage warning protection and battery overcharge protection.
- OOutput power factor 1.0/0.9 for your option. max efficiency reach 95.5%, reduce loss of UPS.
- With input neutral and live line detection function, avoid the reverse connection of UPS utility input
- When utility cut-off, the UPS discharge battery in the battery mode; when the city power is recovery ,UPS turn on automatically, and charge battery at the same time, as unattended function.
- Standard RS232 communication outlet ,connect UPS and computer to realize multifunctional and multi-purpose monitoring and management operations, available SNMP card (optional) to UPS remote monitoring function

### Front & Rear Panel Instruction

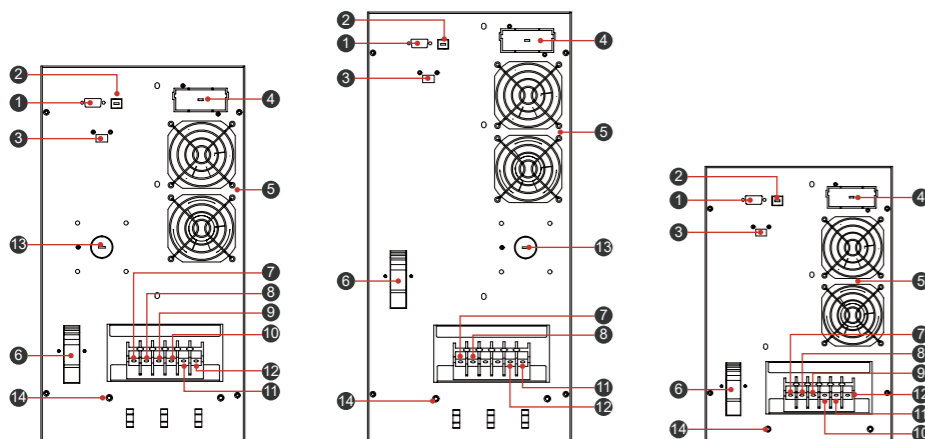

- |                             |                 |                 |                           |
|-----------------------------|-----------------|-----------------|---------------------------|
| 1. RS232 Communication port | 5. Fan          | 9. Battery +    | 13. Maintain Switch Cover |
| 2. USB Communication port   | 6. Input Switch | 10. Battery -   | 14. Ground                |
| 3. EPO Port                 | 7. AC Input N   | 11. AC Output L |                           |
| 4. Intelligent Slot         | 8. AC Input L   | 12. AC Output N |                           |

### Specification

Model		H6K		H6KS		H10K		H10KS	
Capacity	Rated Capacity	6KVA/6KW	6KVA/5.4KW	6KVA/6KW	6KVA/5.4KW	10KVA/10KW	10KVA/9KW	10KVA/10KW	10KVA/9KW
	PF	1.0	0.9	1.0	0.9	1.0	0.9	1.0	0.9
Input	Input format	L+N+PE							
	Rated input voltage	208/220/230/240VAC							
	Voltage range	110~300VAC							
	Frequency range	50/60±6Hz (Default), ±10Hz (Settable)							
	Input power factor	≥0.99							
	Input total harmonic distortion	≤4% inear load							
Output	Output format	L+N+PE							
	Output voltage	208/220/230/240VAC							
	Output accuracy	±1%							
	Output frequency	For on-line mode: follow current frequency, battery mode: 50 / 60Hz±0.1%							
	Output harmonic distortion	≤ 2% linear load; ≤ 4% nonlinear load (PF=0.7)							
	Overload capacity	AC Mode: 30min@102%~110% Load 10min@110%~130% Load 30s@130%~150% Load 200ms@>150% Load		Battery Mode: 1min@102%~110% Load 10s@110%~130% Load 3s@130%~150% Load 200ms@>150% Load					
Switching time	Switch to battery mode	0ms							
	Switch to bypass	4ms							
	AC priority mode	Support							
Efficiency	AC Mode (Full Load)	Peak efficiency 95.5%, Full load efficiency 95%							
	Battery Mode (Full Load)	Peak efficiency 95.3%, Full load efficiency 94.8% (20pcs Battery)							
Battery	Battery type	Lead Acid Battery							
	Battery number	7Ah*16	7Ah*12	16/18/20 (adjustable) 16(default)	16/18/20 (adjustable) 16(default)	7Ah*16	7Ah*14	16/18/20 (adjustable) 16(default)	16/18/20 (adjustable) 16(default)
	Chaging current	1A (default)	1A (default)	1-12A (adjustable)	1-8A (adjustable)	1A (default)	1A (default)	1-12A (adjustable)	1-8A (adjustable)
	Charging mode	Two-stage/three-stage charging							
Display	LCD	2×8 PIN/Pitch 2.54mm, support 128-bit segment code, up to 4 buttons + 4 LEDs, can display operating mode / load / input / output, etc.							
Interface	RS-232	Support: Windows 2000/2003/XP/Vista/2008/7/Linux/Unix and MAC							
	USB	Windows Family & MAC							
	EPO	Support							
	Intelligent slot (Optional)	SNMP/AS400 Relay Card/RS485							
	Maintenance bypass switch (Optional)	Support							
Environmental parameters	Operating ambient temperature	0~40°C							
	Operating environment humidity	20%~95%(no condensation)							
	Storage temperature	-15~60°C (batteries: 0~40°C)							
	Altitude	The elevation should not exceed 1000m, 1000m or above, up to 4000 m, reference IEC62040							
	Noise	≤ 45db							
Mechanical Specifications	Dimensions (D*W*H) (mm)	500*250*615	500*240*462	455*190*330	500*250*615	500*240*462	455*190*330	500*250*615	500*240*462
	Net weight (kg)	53	42	15	12	53	46.5	15	12