

**P36**

USER MANUAL

POWERFUL RECHARGEABLE FLASHLIGHT  
3000 LUMENS MAXIMUM OUTPUT

### Specifications

- 3000 lumens maximum output and 346 meters maximum beam distance.
- High performance LUMINUS SFT-70HD LED.
- USB Type-C charging.
- 21700-5000mAh USB rechargeable battery.
- Two-way clip.
- Modes: Turbo-High-Medium-Low-Eco and Strobe&SOS.
- Beacon guidance function.
- Power indication and low-voltage warning function.
- Dimensions:  $\phi 26.2 \times \phi 26.2 \times L142.1$ MM.
- Weight: 101.7g(without battery)
- Accessories Included: 1\*charging cable, 1\*21700 USB rechargeable battery, 1\* lanyard, 1\* holster, 1\* O-ring, 1\* tail cap


### P36 Data

Mode	Turbo	High	Medium	Low	ECO	Strobe
OUTPUT	3000LM	800LM	300LM	150LM	10LM	3000LM
RUNTIME	2.5h	5h	14.8h	33h	227h	/
INTENSITY	29,990cd					
DISTANCE	346m					
WATERPROOF	1m					
IMPACT RESISTENCE	IPX-8					

Note: all datas above were generated in Fitorch lab.  
Differences may happen basing on usage and conditions.

### Operation

- **On/Off**  
Press the tail switch to turn on the light, and then press the tail switch again to turn off the light.
- **Mode change:**  
When power on, click the side switch to cycle through High-Medium-Low-Eco-Low-Medium-High.
- **Strobe&SOS:**  
Double click the side switch to activate Strobe, and then double click the side switch again to enter SOS.
- **Turbo Function:**  
When power on, press the side switch and hold on 0.5s to activate Turbo mode.
- **Beacon function:**  
When power on, click the side switch 4 times to activate Beacon function.
- **Charging**  
Switch off the light and remove the USB cap to reveal the USB Type-C charging port, and then connect the charging port and the power source by charging cable. The indicator below the side switch will be red during charging, and it will change to green after charging.

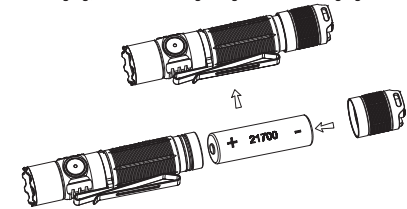

### Usage and Maintenance

- Disassembling the sealed head will damage the lights and void the warranty.
- High quality batteries are recommended.
- O-ring will be wear after a Long-term use, change it In included spare one to maintain watertight seal.
- Unload the batteries if assure the light won't use a bit of long time, then better put it into Inner box(Built-in battery excluded).
- Store and keep the light off fire, statics, steaming and humidity surroundings.
- Clean the body with soft fabric clothing then lubricate In silicon grease per half a year.
- Periodic cleaning of batteries contacts to improve the flashlight performance as dirty contacts cause the lamp flicking, shine intermittently or even fail to illuminate for below factors(Built-in battery excluded).  
A: Battery needs replacing ( choose the battery which mentions on this manual)  
B: PCB, Spring or other contacts is dirty (clean the contacts in cotton swab In soaked rubbing alcohol)

Web: [www.fitorchworld.com](http://www.fitorchworld.com)

### WARNING!

- Looking at the light for a long time will harm your eyes. Don't shine the light directly into anyone's eyes.
- The light will accumulate a lot of heat when used for extended periods, resulting in a high temperature of the light housing. Pay attention to safe use to avoid scalding.
- Do not shine the light to an object at close range to avoid burning the object or causing danger due to high temperature.
- The LED and battery of this light are not replaceable.

### Warranty

- 15 days replacement: Fitorch will replace identical or equal products with documented manufacturing defects within 15 days of purchase.
- 5-year free repair: This light is non-detachable and enjoy the service of 5-year free repair of purchase if problems happen in normal use. Rechargeable battery enjoys 1-year warranty.

Web: [www.fitorchworld.com](http://www.fitorchworld.com)



Facebook



Website

ShenZhen Fitorch Electronics Technology Co., Ltd  
Office Address: 6F, Longsheng Commercial Building  
Dalang St. Longhua new district  
ShenZhen City, China  
Tel: +86-755-2101-3606  
Web: [www.fitorchworld.com](http://www.fitorchworld.com)  
E-mail: [Info@fitorchworld.com](mailto:Info@fitorchworld.com)



说明：

1.展开尺寸为180\*90mm 折后尺寸为60\*90mm

2.印刷:橙色+黑色两色双面印刷

3.材质:128G铜版纸