

Monocrystalline Solar PV Module



High Efficiency



High Reliability



Positive Tolerance




Long Life




Quality Guarantee


12-year materials & quality warranty
25-year linear power output warranty

■ Shine Solar linear power output guarantee
■ Industry standard linear power output guarantee

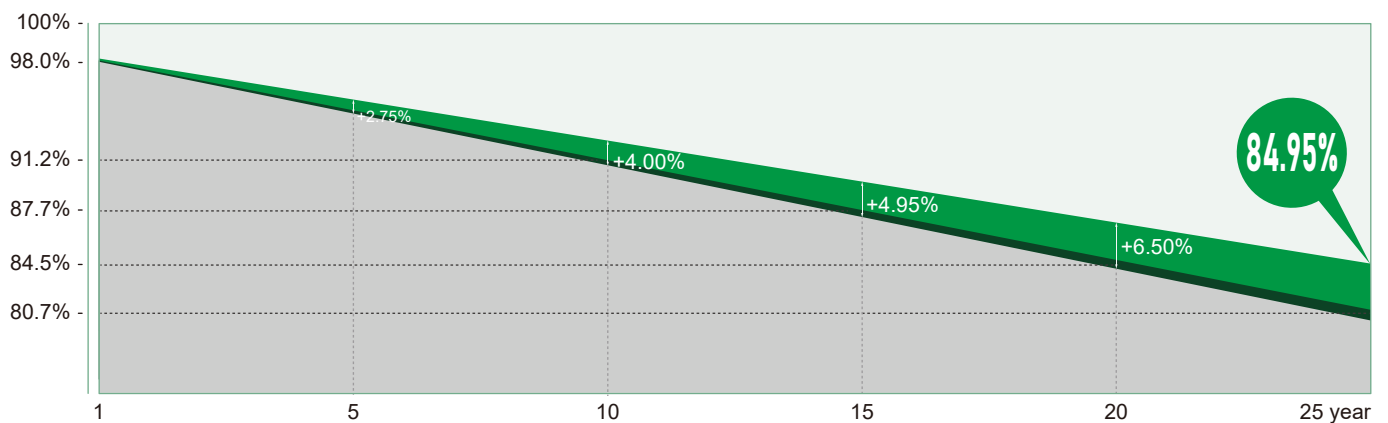

Product Certification



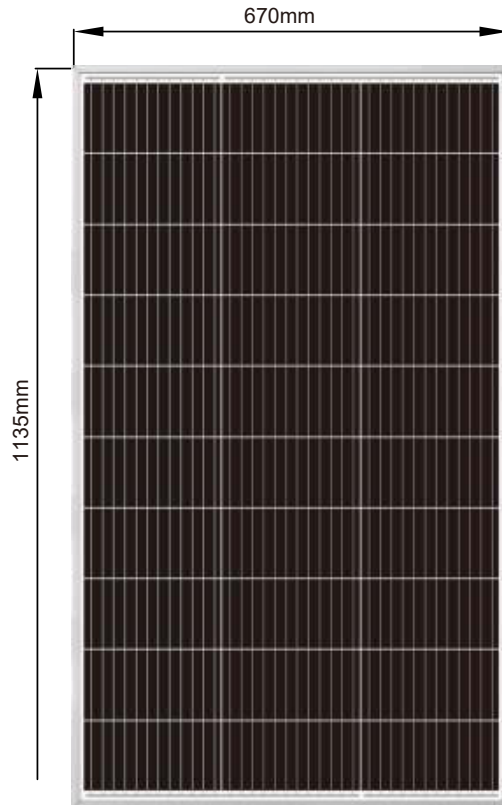

Mono 150W (210 Cells)

MODEL	SRM-150
Maximum Power/Pmax	150W
Optimum Operating Voltage/Vmp	18V
Optimum Operating Current/Imp	8.33A
Open Circuit Voltage/Voc	21.6V
Short Circuit Current/Isc	8.99A
Dimension	1135*670*30mm
Weight	8.8kg

* STC: Irradiance 1000W/m², Cell Temperature 25°C, AM 1.5