


NP12-12 PERFORMANCE SPECIFICATION : Amperes and Watts at 25 °C (77 °F)

F.V. \ TIME		TIME													
		3M	5M	6M	8M	10M	15M	30M	1H	2H	3H	5H	10H	20H	
10.80V	W	612	516	484	407	365	281	171	99.4	54.3	38.8	25.5	13.4	7.25	
	A	54.9	45.7	42.6	35.9	32.0	24.3	14.7	8.47	4.54	3.24	2.10	1.10	0.61	
10.50V	W	690	561	517	435	384	290	175	100.8	54.9	39.2	25.7	13.5	7.29	
	A	62.6	50.4	46.2	38.9	34.2	25.3	15.1	8.59	4.64	3.31	2.16	1.13	0.61	
10.20V	W	740	588	536	451	394	296	177	101.8	55.3	39.5	25.8	13.5	7.32	
	A	68.1	53.2	48.0	40.4	35.0	25.7	15.3	8.67	4.68	3.34	2.18	1.14	0.61	
10.02V	W	764	601	545	459	398	298	178	102.3	55.7	39.8	26.1	13.7	7.40	
	A	71.7	54.9	49.1	41.3	35.4	25.9	15.4	8.71	4.72	3.37	2.20	1.15	0.62	
9.60V	W	800	618	556	468	403	300	180	102.8	56.1	40.1	26.3	13.8	7.47	
	A	75.6	56.7	50.2	42.2	35.8	26.1	15.5	8.76	4.75	3.39	2.22	1.16	0.62	


Characteristics

DISCHARGE CHARACTERISTICS


Discharge Characteristics Curves at 25°C

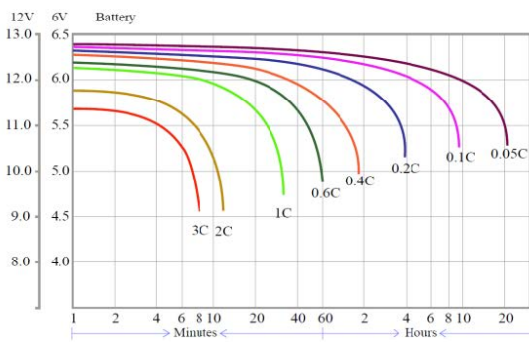

Float Service Life

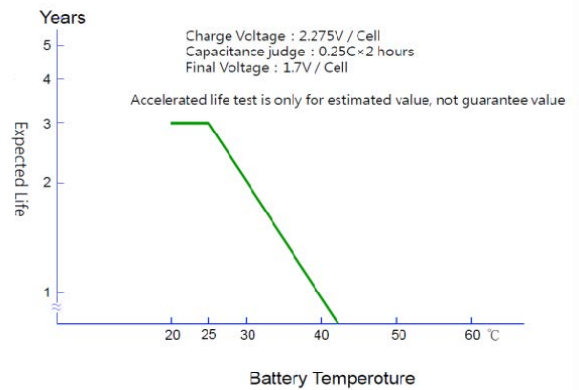

CHARGE CHARACTERISTICS

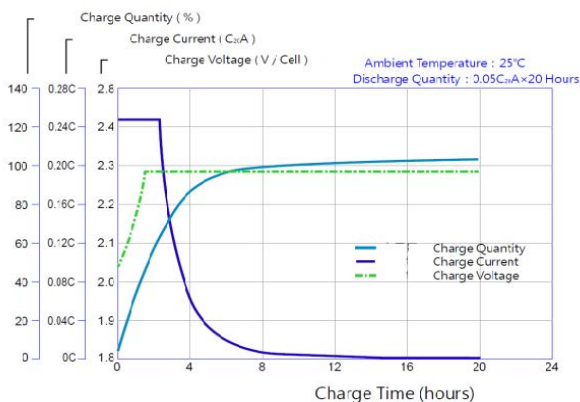

CHARGE VOLTAGE

