


57412[12V74Ah]



Dimensions (mm)

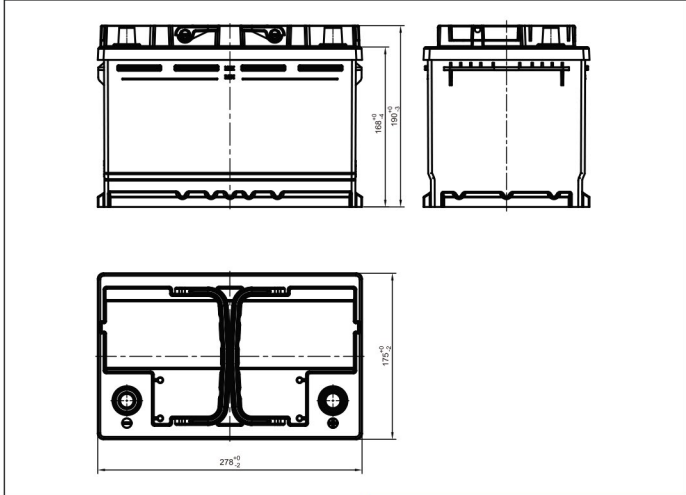


Physical Specification (mm)

| | | |
|------------------------|-----------------------------|-------------------------------------|
| Nominal Voltage | | 12V |
| Nominal Capacity(20HR) | | 74Ah |
| Dimension | Length | 278+0/-2mm(10.94inches) |
| | Width | 175 +0/-2mm(6.89inches) |
| | Container Height | 190 +0/-3mm(7.48inches) |
| | Total Height(with Terminal) | 190 +0/-3mm(7.48inches) |
| Weight | | Approx 16.4Kg(36.16lbs) |
| Acid | | 1.280±0.015g/cm ³ (25°C) |
| Standard Terminal | | 1 |
| Cell layout | | 0 |
| Hold-Down | | B13 |
| Cell plate qty | | / |
| Case | | Gray-PP Material |
| Cover | | Gray-PP Material |
| Handle | | Gray-PP Material |
| QTY/PLT/layer | | / |


Electrical Specification

| | | |
|-------------------------------------------|--------------------|--------|
| Rated Capacity | 20 hour rate(3.6A) | 74Ah |
| Reserve Capacity | | 122min |
| Cold Cranking Performance Amps@0°F(-18°C) | | 640A |


Discharge Characteristics(25°C,77°F)

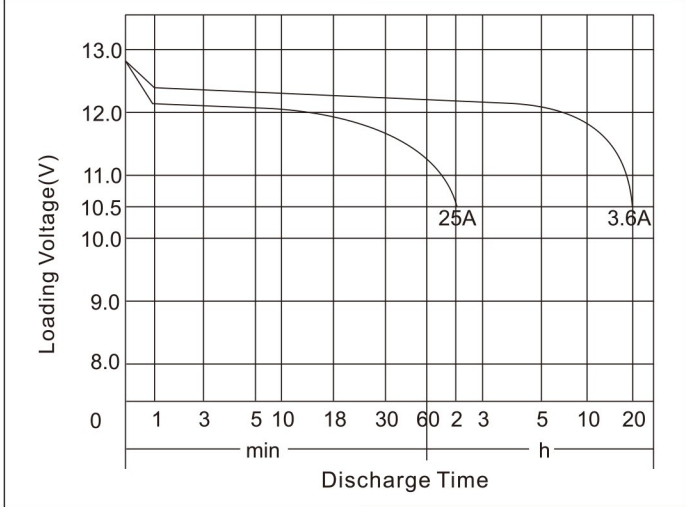

Standard Terminal (mm) Cell Layout

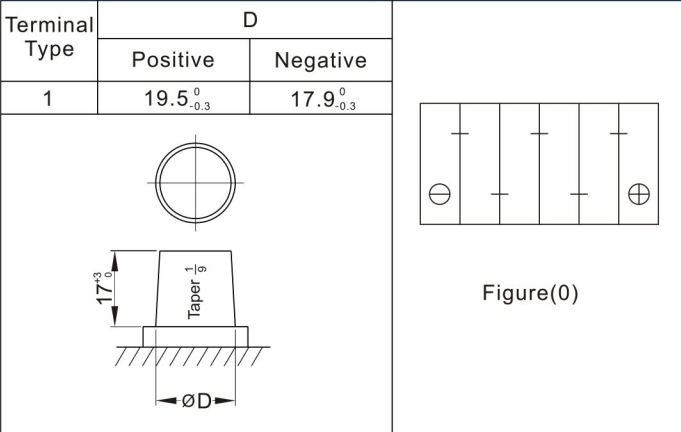

Discharge Characteristics(-18°C,0°F)

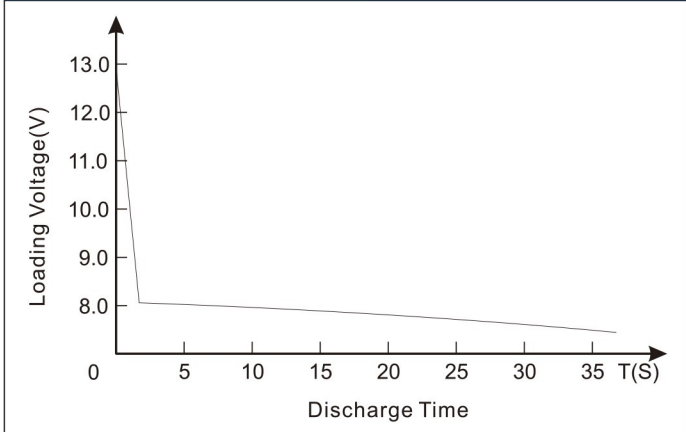

*Values are subject to variation of +/- 5% in normal manufacturing processes.
 *Technical specifications and the product line above could be changed without prior notice.