PS4000 C-SJ5-25



Solar Submersible Pump System for 4" wells

System Overview

Head Flow rate max. 140 m max. 7,0 m³/h

Technical Data

Controller PS4000

- Control inputs for dry running protection, remote control etc.
- · Protected against reverse polarity, overload and overtemperature
- Integrated MPPT (Maximum Power Point Tracking)

Power	max. 4,0 kW
Input voltage	max. 375 V
Optimum Vmp*	> 238 V
Motor current	max. 15 A
Efficiency	max. 98 %
Ambient temp.	-3050 °C
Enclosure class	IP54

Motor ECDRIVE 4000-C

- Maintenance-free brushless DC motor
- Water filled
- Premium materials, stainless steel: AISI 304/316
- No electronics in the motor

Rated power	3,5 kW
Efficiency	max. 92 %
Motor speed	9003.300 rpm
Insulation class	F
Enclosure class	IP68
Submersion	max. 250 m


Pump End PE C-SJ5-25

- Non-return valve
- Premium materials, stainless steel: AISI 304

Pump Unit PU C-SJ5-25 (Motor, Pump End)

Borehole diameter	min. 4,0 in
Water temperature	max. 50 °C

Standards



IEC/EN 61702:1995, IEC/EN 62253 Ed.1

The logos shown reflect the approvals that have been granted for this product family. Products are ordered and supplied with the approvals specific to the market requirements.

*Vmp: MPP-voltage under Standard Test Conditions (STC): 1000 W/m² solar iradiance, 25 °C cell temperature










Created by LORENTZ COMPASS 3.0.10.9 All specifications and information are given with good intent, errors are possible and products may be subject to change without notice. Pictures may differ from actual products depending on local market requirements and regulations.



PS4000 C-SJ5-25


Solar Submersible Pump System for 4" wells

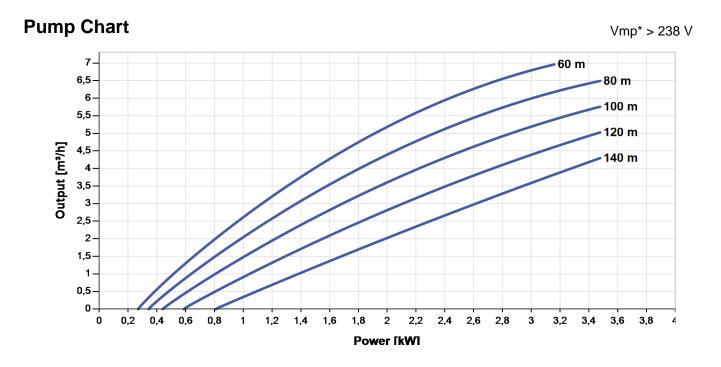


Dimensions and Weights

Controller

 $\begin{array}{rrrr} H = & 595 \text{ mm} \\ H2 = & 563 \text{ mm} \\ W1 = & 178 \text{ mm} \\ W2 = & 156 \text{ mm} \\ W3 = & 116 \text{ mm} \\ D = & 165 \text{ mm} \\ D1 = & 150 \text{ mm} \end{array}$

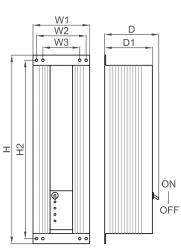

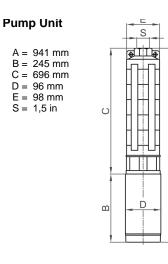

Controller	9,0 kg
Pump Unit	18 kg
Motor	10 kg
Pump End	8,0 kg

*Vmp: MPP-voltage under Standard Test Conditions (STC): 1000 W/m² solar iradiance, 25 °C cell temperature

BERNT LORENTZ GmbH & Co. KG

Kroegerskoppel 7, 24558 Henstedt-Ulzburg, Germany, Tel +49 (0)4193 7548-0, Fax -29, www.lorentz.de



Created by LORENTZ COMPASS 3.0.10.9 All specifications and information are given with good intent, errors are possible and products may be subject to change without notice. Pictures may differ from actual products depending on local market requirements and regulations.