



SERIES 3500 compact








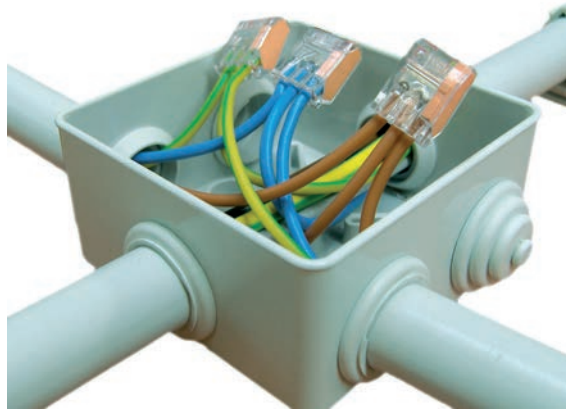


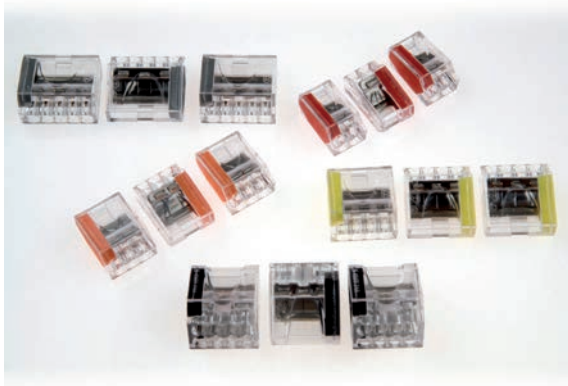











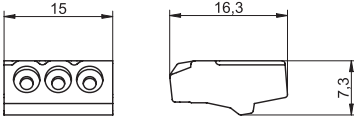





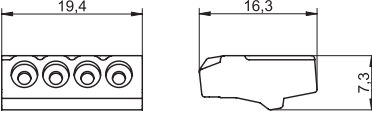



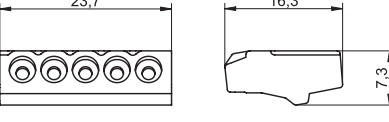


Used for push-in connections in installations and electrical appliances.

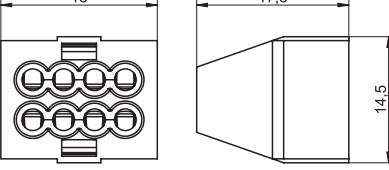

Raw materials:

Moulding: transparent polycarbonate. V0 (according to UL94).

Insert: stainless steel.

3502c ●  2,5 mm ² / 0,5 mm ²		 10.000 pcs. 360x350x300 mm	 10,7 Kg
		 100 pcs. 90x65x55 mm	 0,11 Kg
3503c ●  2,5 mm ² / 0,5 mm ²		 6.000 pcs. 320x330x370 mm	 9,00 Kg
		 100 pcs. 100x75x70 mm	 0,15 Kg
3504c ●  2,5 mm ² / 0,5 mm ²		 6.000 pcs. 330x320x370 mm	 11,4 Kg
		 100 pcs. 100x75x70 mm	 0,19 Kg
3505c ●  2,5 mm ² / 0,5 mm ²		 6.000 pcs. 370x370x370 mm	 13,8 Kg
		 100 pcs. 115x85x70 mm	 0,23 Kg
3508c ●  2,5 mm ² / 0,5 mm ²		 3.000 pcs. 320x330x370 mm	 13,2 Kg
		 50 pcs. 100x75x70 mm	 0,22 Kg
Voltage 450V	Current rating 24A	 85°C	
Voltage 450V	Current rating 24A	 85°C	
Voltage 450V	Current rating 24A	 85°C	
Voltage 450V	Current rating 24A	 85°C	
Voltage 450	Current rating 24A	 85°C	