


B8

User manual

The Speras B8 is a powerful rechargeable headlamp with a maximum output of 700 lumens and a beam throw of up to 70 meters. It features a one-step access to turbo mode via a separate touch key. The headlamp offers six different light sources: spotlight, floodlight, spotlight+floodlight, red, green, and blue, making it versatile for various outdoor activities. Whether you're hiking, walking, night running, camping, fishing, performing emergency repairs, or simply need reliable daily outdoor lighting, the Speras B8 has you covered.

Inside the box

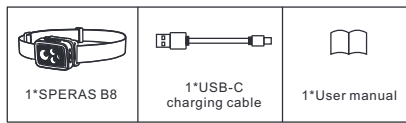


Specification

FL 1 STANDARD	Spotlight	Floodlight	Spotlight+Floodlight	Red	Green	Blue
Output	3-330LM	5-150LM	700LM	2-18LM	4-45LM	1-5LM
Runtime	180-6H	35-14H	4H	15H	14H	20H
Beam Distance	7-66m	4-26m	70m	5m	8m	3m
Waterproof	IP66					
Dimension	60.5(L)*31.2(W)*43.1(H)					
Weight	77.2g(included battery)					

The above data has been measured in accordance with international flashlight testing standards ANSI/NEMA FL1 using SPERAS 3.7V/1800mAh 103466 battery built-in Li-Ion battery under laboratory conditions.

Operating Instructions

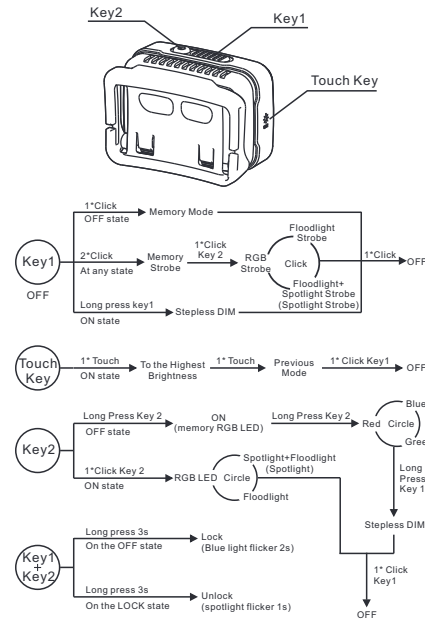

Note: when in lock state, click any switch, the blue led will strobe to indicate the headlamp is in the lock state.

Battery & Charging indication

When turn on the headlamp, the LED indicator will automatically indicate the power level for 3 seconds and show as below:

100%-75%	4 blue LED
75%-50%	3 blue LED
50%-25%	2 blue LED
25%-5%	1 blue LED
Below 5%	1 blue LED flash

When charge the headlamp, the LED indicator will automatically indicate the power level and show as below:

Below 25%	1 blue LED flash
25%-50%	1 blue LED ON, 2nd LED flash
50%-75%	2 blue LED ON, 3rd LED flash
75%-100%	3 blue LED ON, 4th LED flash
100%	4 blue LED ON

Danger

- DO NOT shine the light directly into eyes. This may cause temporary blindness or permanent damage to the eyes.
- DO NOT put the flashlight into flames or excessive heat sources. This may cause the battery to explode.

Warranty

- The product is provided with a 2-year warranty. Any non-artificial damage, please contact the SPERAS aftersales department.
- The warranty does not cover normal wear and tear, modifications, misuse, disintegrations, negligence, accidents, improper maintenance, or repair by anyone other than an authorized retailer or SPERAS itself.

